

## SMD Communication Crystals

Acceleration tolerant SMD AT-cut quartz crystal in ceramic package with 6.0 mm x 3.5 mm footprint

### Product description

Very small SMD AT-cut quartz crystal specifically designed to operate in vibration prone environments. Parts are able to survive acceleration 20,000G and higher with minimal parameter change. Vibration G-sensitivity significantly reduced. True SMD style, ceramic package with metal lid, seamed sealed. The product is supplied on tape and reel.



### Applications

- GPS
- Agriculture
- Avionics
- Guidance
- Navigation
- Military
- Other

### Features

- G-sensitivity down to 0.2ppb/G
- Low aging
- Up to 50,000G acceleration event survival
- Very good short term stability

### Specifications

#### 1.0 SPECIFICATION REFERENCES

Line	Parameter	Description
1.1	Model description	RGX-3
1.2	RoHS compliant	Yes
1.3	Reference number	
1.4	Rakon part number	

#### 2.0 FREQUENCY CHARACTERISTICS

Line	Parameter	Test Condition	Value	Unit
2.1	Frequency		10 to 30	MHz
2.2	Calibration tolerance	Frequency at 25°C ±2°C and specified load capacitance	±10 to 20	ppm
2.3	Reflow shift	Two consecutive reflows as per attached profile after 4 hours recovery at 25°	±1 max	ppm
2.4	Frequency stability over temperature	Referenced to frequency reading at 25°C and the specified load capacitance	±4 to 40	ppm
2.5	Temperature range	Operating temperature	-55 to 95	°C
2.6	Frequency perturbations	Peak-to-peak deviation from the frequency vs. temperature 5th order curve fit. Minimum of 1 frequency reading every 3°C, over the operating temperature range	0.2 to 1	ppm
2.7	Short term stability	Root Allan Variance for 1 second Tau	1 max	ppb
2.8	Long term stability	Frequency drift over 1 year	±1 max	ppm
2.9	Long term stability	Frequency drift over 10 years	±5 max	ppm
2.10	G-Sensitivity	Gamma vector of all three axes from 30Hz to 1500Hz. Values as low as 0.2ppb/G available depending on design (Note 1)	0.2 to 0.8	ppb/g
2.11	Frequency offset after acceleration event	20,000G/2ms acceleration event in the z axis. Theoretical recovery time of 100ms (Note 1)	-3 to 0	ppm

### 3.0 ELECTRICAL

Line	Parameter	Test Condition	Value	Unit
3.1	Load capacitance (CL)	Frequency is calibrated at room temperature.	7 to 35	pF
3.2	Shunt capacitance (C0)	Operating specification	4 max	pF
3.3	Pullability		2 to 40	ppm/pF
3.4	Drive level	Operating specification	100 max	$\mu$ W
3.5	Equivalent series resistance (ESR). Fundamental		50 max	$\Omega$
3.6	Insulation resistance (IR)	100V $\pm$ 15V at 25°C	500 min	M $\Omega$

### 4.0 ENVIRONMENTAL

Line	Parameter	Description
4.1	Shock	Half sine-wave acceleration of 3,000G peak amplitude for 0.3ms duration, 3 cycles in each plane
4.2	Vibration	10G RMS 30Hz to 1500Hz duration of 2 hours in each axis
4.3	Humidity	After 48 hours at 85°C 85% relative humidity non-condensing
4.4	Thermal shock	Exposed at -40°C for 30 minutes then to 85°C for 30 minutes constantly for a period of 5 days
4.5	Storage temperature	-55 to 105°C

### 5.0 MANUFACTURING INFORMATION

Line	Parameter	Description
5.1	Reflow	Able to withstand solder reflow process. See reflow profile attached
5.2	Packaging description	Tape and Reel. Standard packing quantity is 2000 units per $\varnothing$ 254mm reel, and 4000 units per $\varnothing$ 330mm reel

### 6.0 MARKING


Line	Parameter	Description
6.1	Type	Laser engraved
6.2	Line 1	Rakon Logo and the last four characters of Rakon part number
6.3	Line 2	Pin 1 mark and Date Code

### 7.0 SPECIFICATION NOTES


Line	Parameter	Description
7.1	Note 1	The min. G-Sensitivity and max. acceleration event survival specifications cannot be met at the same time. Please contact Rakon Sales with specific requirements

# Drawing Name: RGX-3 Model Drawing


## MODEL OUTLINE

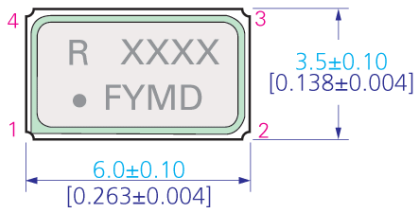


TOP VIEW

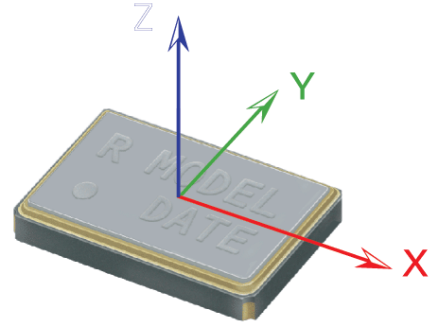

MODEL COORDINATE ORIENTATION



SIDE VIEW

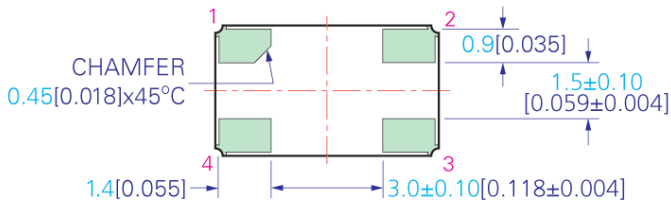


BOTTOM VIEW

### PIN CONNECTIONS

1	CRYSTAL
2	GND
3	CRYSTAL
4	GND

## RECOMMENDED PAD LAYOUT - TOP VIEW

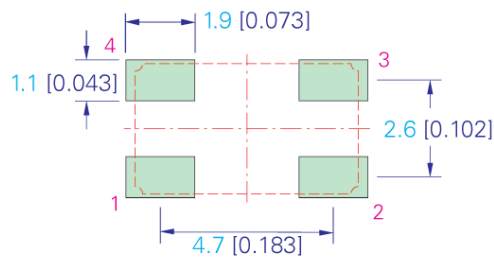

TITLE: RGX-3 MODEL

RELATED DRAWINGS:

FILENAME: CAT351

REVISION: C

DATE: 15-Oct-09

SCALE: 5 : 1

Millimetres [inch]

Tolerance:

XX = ±0.5

X.X = ±0.2

X.XX = ±0.10

X.XXX = ±0.05

X° = ±1.0°

Hole = ±0.10

**rakon**

©2009 Rakon Limited

